


Pipe & Wall Videoscope

Product Features

- 3.5" LCD display
- Support Video recording (MPEG4)
- Support Snapshot (JPEG)
- Support replay video and image
- Support reflected lens tube allow user to capture positive images when attach a mirror
- Support AV out (PAL/NTSC selectable)
- Working temperature -20° to 60° c
- Power charger indicator light
- Portable battery design allow user to charge battery at any time
- Support USB port allow user transfer data to PC
- LED illuminator light adjustable
- 2GB SD card
- Support 16 operation languages

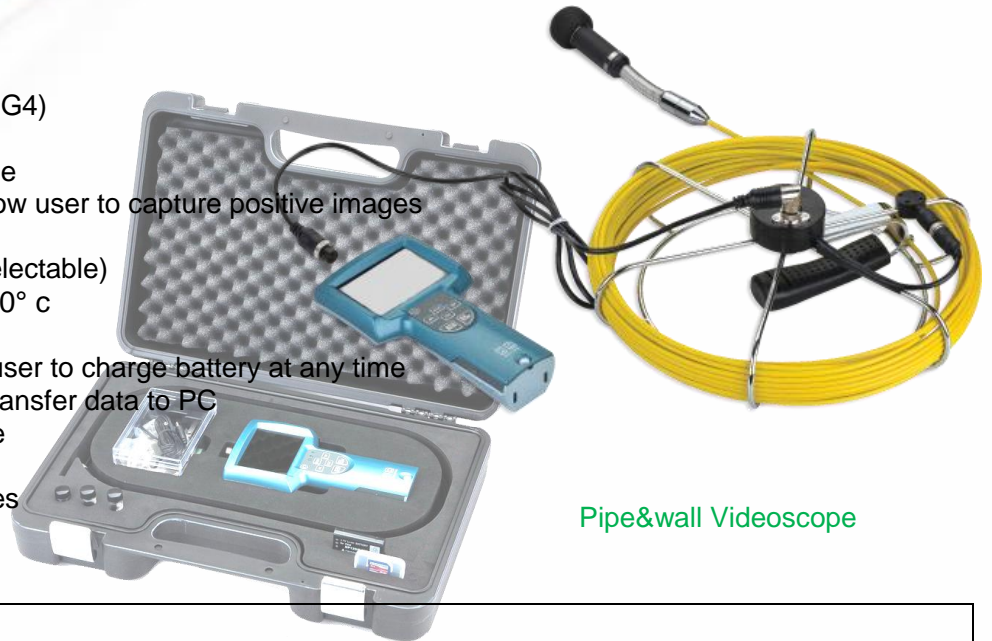

Pipe&wall Videoscope

| | |
|--------------------------------|---|
| Display Unit | Power: DC5V Display: 3.5" TFT LCD monitor resolution: 720 x 480 Interface: USB 1.1/ 2.0, AV out Battery: Rechargeable Li-ion Battery Light adjustable knob Reset function |
| Camera probe (selected) | Auto focus camera OD20 mm Diameter/ Resolution 1,300,000 pixels, - Fiber Glass cable length: 10 / 20 / 30 / 40 meter with wheel (selected) - Field of view (FOV): 67° - Depth of view (DOV): 8 cm to infinity (Auto focus) - Light source: 12 LED - Probe working Temperature: -20° to 60° C - Water/Oil proof (Ingress protection): IP68 <hr/> Camera OD25 mm Diameter/ Resolution 1,300,000 pixels, - Tube length: 1-30 meter (selected) - Field of view (FOV): 67° - Depth of view (DOV): 2-5 cm - Light source: 12 LED - Probe working Temperature: -20° to 60° C - Water/Oil proof (Ingress protection): IP68 |
| Power Charger | 100-240V AC in / 5.5V DC out |
| Option | AV-out cable |